

SPEED RAMPS

Highly effective speed restriction ramps for safe yet practical use.



Provides excellent all night visibility
With integral white reflectors



Prevent individual segments walking
With dog bone connectors




Universal application
Suitable for concrete and asphalt



Extra protection
Incorporates cable release

Will withstand 40 tonne HGV's
Manufactured from heavy duty Thermoplastic

Increase productivity
Quick and easy to install

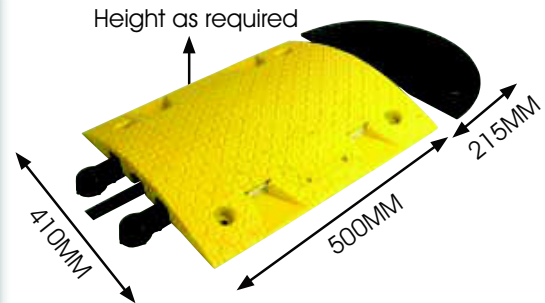

Ramp Height	Suggested Speed
50MM	10MPH
75MM	5MPH

Product Code	Description	Ramp Height	Colour
Y01.50Y	INNER SECTION	50MM	YELLOW
Y01.50K	INNER SECTION	50MM	BLACK
Y02.50Y	END CAP	50MM	YELLOW
Y02.50K	END CAP	50MM	BLACK
Y04.75Y	INNER SECTION	75MM	YELLOW
Y04.75K	INNER SECTION	75MM	BLACK
Y05.75Y	END CAP	75MM	YELLOW
Y05.75K	END CAP	75MM	BLACK
Y07.000	10 X 105MM FIXINGS FOR ABOVE		

Quick selector chart

Ramp Length (mm)	Inners		End Caps		Fixings	Dogbones
	B	Y	B	Y		
1930	1	2	2	-	16	8
2430	2	2	1	1	20	10
2930	3	2	-	2	24	12
3430	3	3	1	1	28	14
3930	3	4	2	-	32	16
4430	4	4	1	1	36	18
4930	5	4	-	2	40	20
5430	5	5	1	1	44	22
5530	5	6	2	-	48	24
6430	6	6	1	1	52	26
6930	7	6	-	2	56	28
7430	7	7	1	1	60	30
7930	7	8	2	-	64	32
8430	8	8	1	1	68	34
8930	9	8	-	2	72	36
9430	9	9	1	1	76	38
9930	9	10	2	-	80	40

If no end caps required, add one extra inner for same overall length plus 70mm.



RAMP

Strategic siting of a sign to indicate ramp is strongly recommended.

See page 7.57 for permanent signs

CALL FREE ON 0808 118 1922